




ISO9001 : 2000


AIR COOLED / WATER COOLED AFTER COOLER

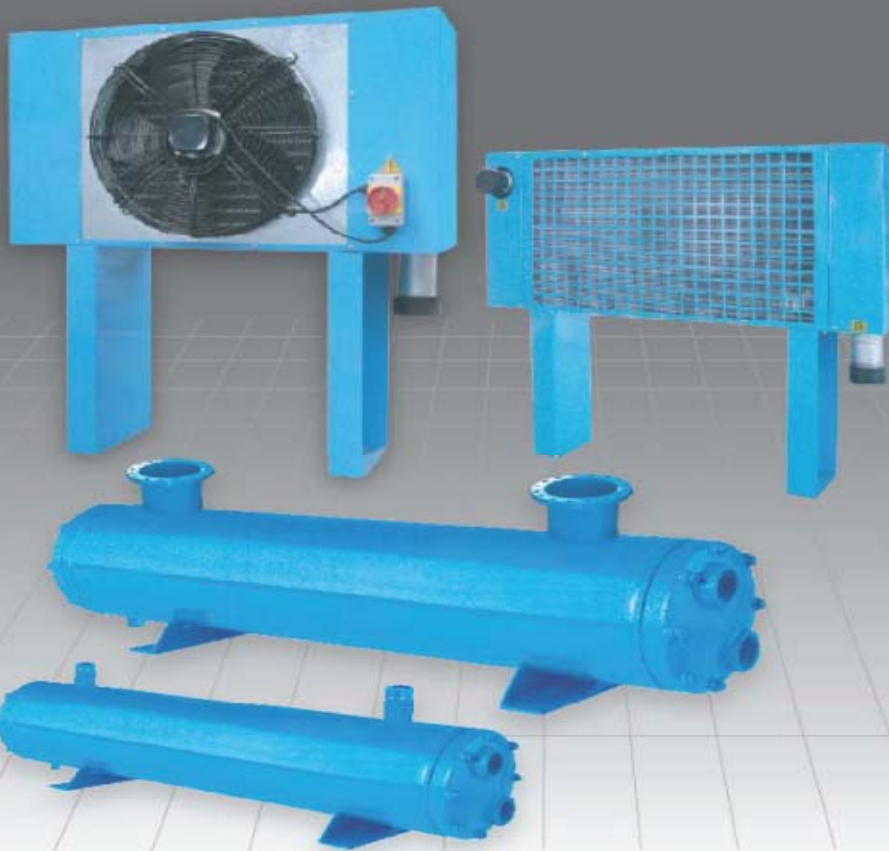


YOUR SOLUTION



AIR COOLED - AFTER COOLER

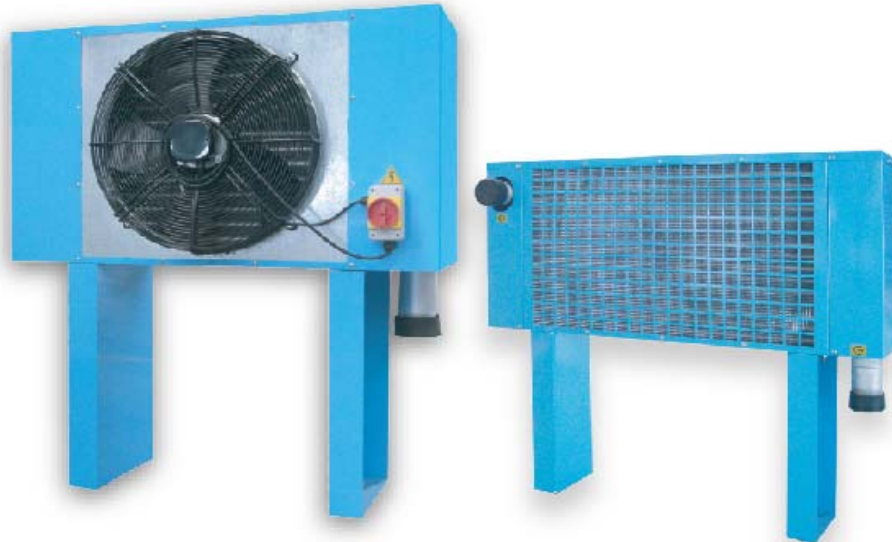



CAPACITY : 1.8 - 36 M³ / min
AIR CONNECTION : 1" ~ 3"
MAX. WORKING PRESSURE : 16 Kg/cm²
FLOW RATE REFERS TO :
 99 °C INLET
 35 °C AMBIENT
 + 10 °C OUTLET OF AMBIENT TEMP.

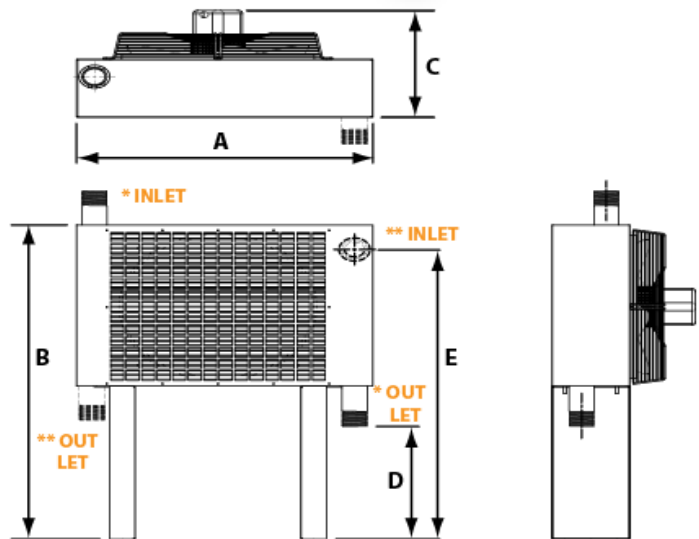

Series	Air flow rate		V / Ph / Hz.	Conn.	Dimension (mm.)					Weight (Kg.)
	M ³ /min	CFM			A	B	C	D	E	
DAC 015	1.8	63	220/1/50	1"	445	710	235	360	-	17
DAC 040	5.5	193	220/1/50	1-1/2"	573	820	280	300	-	29
DAC 075	11	385	220/1/50	2"	880	820	310	320	-	38
DAC 150	22	770	380/3/50	2-1/2"	920	1000	320	-	930	51
DAC 250	36	1260	380/3/50	3"	1120	1200	330	-	1130	76

* INLET & OUTLET FOR MODEL DAC 015 - 075
 ** INLET & OUTLET FOR MODEL DAC 150 - 250

WATER COOLED - AFTER COOLER

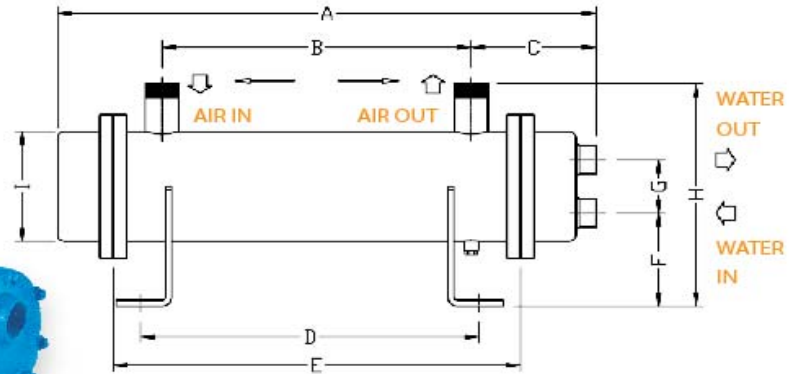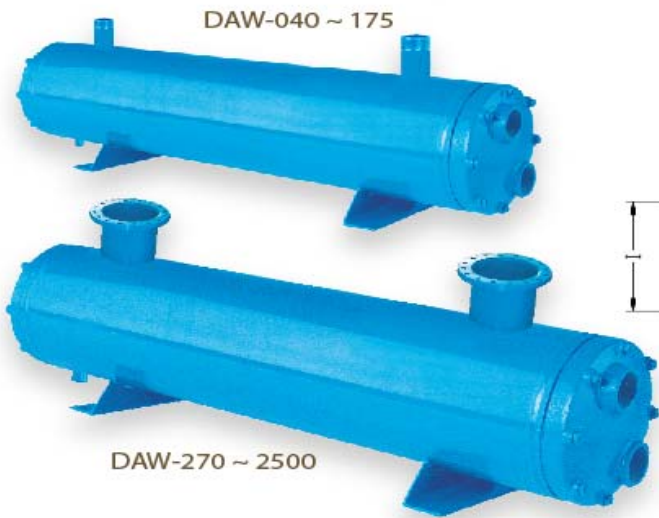

ITEM	SERIES	DAW-040	DAW-060	DAW-125	DAW-175	DAW-270	DAW-350	DAW-450	DAW 550	
Air - flow rate (A)	M ³ /min	4,5	7,0	16	28	36	48	63	75	
Air - flow rate (B)	M ³ /min	5,4	8,4	19	34	43	58	74	80	
Air - in pipe size	Inch	1-1/2" PT	2" PT	2-1/2" PT	2-1/2" PT	3" PT	3" PT	4" FL	4" FL	
Air - out pipe size	Inch	1-1/2" PT	2" PT	2-1/2" PT	2-1/2" PT	3" PT	3" PT	4" FL	4" FL	
Air drain pipe size	Inch	1/2" PT	1/2" PT	1/2" PT	1/2" PT	1/2" PT	1/2" PT	1/2" PT	1/2" PT	
Dimension	A	mm.	780	930	1205	1405	1460	1710	1235	1435
	B	mm.	448	570	795	965	1032	1265	760	960
	C	mm.	181	195	223	238	235	243	260	260
	D	mm.	490	522	742	902	942	1192	710	910
	E	mm.	600	800	950	1100	1300	1500	1000	1200
	F	mm.	140	140	200	200	200	200	174	174
	G	mm.	80	80	100	100	100	100	120	120
	H	Inch	335	335	455	455	478	478	486	486
	I	mm.	6"	6"	8"	8"	8"	8"	10"	10"
Water - in pipe size	Inch	1"	1"	1"	1"	1-1/2"	1-1/2"	2"	2"	
Water - out pipe size	Inch	1"	1"	1"	1"	1-1/2"	1-1/2"	2"	2"	
Water - flow rate	L/hr	1800	2100	3800	4500	5500	6300	7600	10000	
Copper tube diameter	CU	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	
Coper tube quantity	no.	48	48	98	98	98	98	160	160	
Weight	Kg.	32	43	83	96	113	130	135	145	

ITEM	SERIES	DAW-650	DAW-750	DAW-850	DAW-950	DAW-1200	DAW-1700	DAW-2500	DAW-4000	
Air - flow rate (A)	M ³ /min	80	93	116	125	140	180	250	430	
Air - flow rate (B)	M ³ /min	92	115	124	141	178	240	275	498	
Air - in pipe size	Inch	6" FL	6" FL	6" FL	8" FL	8" FL	10" FL	10" FL	12" FL	
Air - out pipe size	Inch	6" FL	6" FL	6" FL	8" FL	8" FL	10" FL	10" FL	12" FL	
Air drain pipe size	Inch	1/2" PT	3/4" PT	3/4" PT	3/4" PT	3/4" PT	3/4" PT	3/4" PT	3/4" PT	
Dimension	A	mm.	1645	1835	1755	1955	2155	2070	2360	2500
	B	mm.	1120	1310	1170	1370	1570	1300	1590	1500
	C	mm.	285	285	315	315	315	415	415	500
	D	mm.	1120	1260	1170	1370	1370	1241	1503	1500
	E	mm.	1400	1600	1500	1700	1900	1700	1900	1900
	F	mm.	174	174	214	214	214	225	225	250
	G	mm.	120	120	150	150	150	156	156	160
	H	Inch	516	516	607	607	607	632	632	730
	I	mm.	10"	10"	12"	12"	12"	14"	14"	16"
Water - in pipe size	Inch	2"	2"	2"	2-1/2"	2-1/2"	3"	3"	3"	
Water - out pipe size	Inch	2"	2"	2"	2-1/2"	2-1/2"	3"	3"	3"	
Water - flow rate	L/hr	12000	13000	15500	17000	19000	24000	32000	42000	
Copper tube diameter	CU	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	
Copper tube quantity	no.	160	160	236	236	236	294	294	374	
Weight	Kg.	162	180	220	240	265	295	330	456	

(A) Nominal cooling capacity conditions : Cooling water in 30°C, water Out 36°C, Air in 99°C, Air out 40°C

(B) Nominal cooling capacity conditions : Cooling water in 25°C, water Out 30°C, Air in 99°C, Air out 33°C

Air pressure 7 bar, Water pressure 3 bar

YOUR SOLUTION



Water chiller - IPT Series



Water chiller - LT Series



Water chiller - SLT, PST Series



Water chiller - OLT Series



Air dryer - CDT Series



Air dryer - Mast Series



Air cooled - After cooler
Water cooled - After cooler



Compressed air filter

Distributor :